

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
31 December 2003 (31.12.2003)

PCT

(10) International Publication Number
WO 2004/001311 A1

(51) International Patent Classification⁷: **F27B 17/02**,
A61K 6/00, F27B 5/14

(72) Inventor; and

(75) Inventor/Applicant (for US only): **HAUNER, Wighbert**
[—/—]; Birkenwaldchen 59, 63225 (DE).

(21) International Application Number:

PCT/US2003/019327

(74) Agents: **HURA, Douglas, J. et al.**; Dentsply International
Inc., 570 West College Avenue, P.O. Box 872, York, PA
17404-0872 (US).

(22) International Filing Date: 18 June 2003 (18.06.2003)

(25) Filing Language:

English

(81) Designated States (national): CA, JP, US.

(26) Publication Language:

English

(84) Designated States (regional): European patent (AT, BE,
BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU,
IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR).

(30) Priority Data:

102 27 566.1

20 June 2002 (20.06.2002) DE

Published:


— with international search report

— before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments

(71) Applicant (for all designated States except US):
DENTSPLY INTERNATIONAL INC. [US/US]; 570
West College Avenue, P.O. Box 872, York, PA 17405-0872
(US).

[Continued on next page]

(54) Title: **DEVICE FOR FIRING CERAMIC FOR DENTAL PROSTHESES**

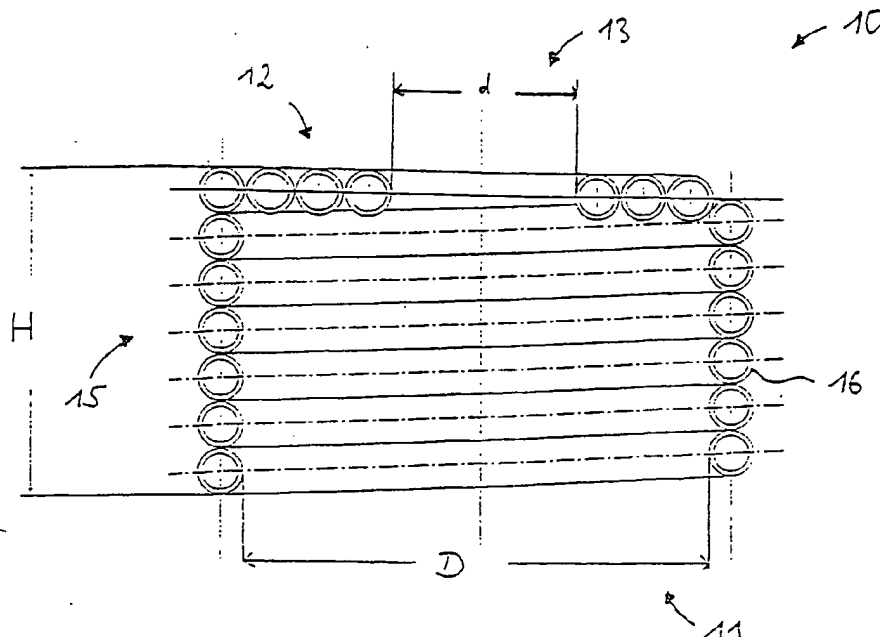

(57) Abstract: A heating muffle for a muffle kiln for the production of a dental ceramic product containing titanium, which comprises a hollow unit, which is provided with at least one opening for the uptake of the ceramic product and has completely heatable inner walls, an which can form together with a pedestal a firing chamber in which the ceramic product is heated by the inner walls, wherein the hollow unit comprises at least one spirally bent tube containing a heat conductor for a uniform heat transfer to the product and in order to avoid temperature gradients.

WO 2004/001311 A1



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

DEVICE FOR FIRING CERAMICS FOR DENTAL PROSTHESES

The present invention concerns a heating muffle for a muffle kiln for the production of a dental ceramic product containing titanium according to claim 1, a method for the production of such a heating muffle, as well as a muffle kiln containing the heating muffle.

Heating muffles as a component of dental ceramic muffle kilns have been known for a long time. They are comprised of refractory ceramics, ceramic fibers or quartz as a support material. A heating element is usually spirally shaped or of helical or zigzag shape fixed in the support material. The heating element is usually inserted in a groove milled in the support material, or it is attached in a tube of fused quartz or quartz glass. These heating muffles are constructed of a hollow unit comprised of a cylindrical tube, which is open on both ends, and which has corresponding fixtures for the heat conductor. Incorporated in the muffle kiln, these heating muffles are sealed on top by an insulating plate and on the bottom by an insulating pedestal for firing. It is a disadvantage in this construction that the complete inner wall construction of the hollow unit cannot be heated. Therefore, when the unit is heated up, a rather large outflow of heat occurs through the two unheated surfaces. i.e., the

insulating plate and the pedestal, whereby a particularly dense heat outflow occurs via the upper insulating plate. Therefore, vertical and horizontal temperature gradients occur that are unfavorable for the article to be fired.

Temperature gradients are a particular disadvantage when a dental ceramic product containing titanium is to be fired. Titanium has a behavior that is specific for this metal. A phase jump occurs at 822°C, which leads to a volume change of the titanium. Therefore, in the production of dental ceramic products containing titanium, one must avoid exceeding this temperature. For dental ceramic products containing titanium, special low-melting ceramic compounds were developed, which melt just below 822°C and require an exact firing temperature. Therefore, the creation of a muffle kiln and a heating muffle which assure a uniform heat transfer to the product and avoid temperature gradients has been desired.

A muffle is known from US-A-6,157,004, which has a cylindrical hollow unit, which is sealed on one end with a flat cylindrical cover. The inner wall can be completely heated by heating wires provided in the muffle. The electrical heating wires are spaced at certain distances from one another inside the cylindrical hollow unit and can be turned on or off separately from one another by means of a control unit. The heating wires are

turned on or off corresponding to a preset threshold value of two temperature sensors which are arranged at two different levels in the firing chamber of the muffle kiln. In this way, a uniform heating of the ceramic products to be fired in the kiln is achieved and temperature gradients are avoided. This muffle, however, does not solve these problems. In contrast, it has several disadvantages.

First of all, an expensive temperature regulation is necessary. This temperature control, however, reacts only very sluggishly and slowly to a temperature gradient, since the heating wires lie way inside the cylinder walls and they are at a far distance from the inner walls of the cylinder, so that relatively large temperature fluctuations result during operation of this heating muffle, despite the expensive control. This temperature regulation leads to temperature differences and temperature gradients on the inner wall of the hollow unit of the heating muffle. Locally overheated regions and points occur, so-called "hot spots", which do not permit a uniform heat transfer to a ceramic product and an exact temperature program for a firing process with this heating muffle.

Secondly, the muffle described in US-A-6,157,004 can take up at least two ceramic products. These ceramic products are arranged on top of a pedestal along the circumference, which

pedestal, together with the muffle, forms the firing chamber. In this way, each individual dental ceramic product is rotated around an axis, which is parallel to the cylinder axis of the muffle. During their rotation, the individual ceramic products are cooled on their side turned away from the inner wall of the muffle during firing. The side turned toward the inner wall lies closer to the inner wall of the muffle, by which the ceramic product is heated, while on the other hand, the side turned away from the inner wall is further distanced from the heat source. Therefore, during rotation, a temperature gradient necessarily arises between the side of the ceramic product turned toward the inner wall and the side turned away from the inner wall, when the ceramic product is fired. For this reason also, the heat transfer to the ceramic product to be fired is nonuniform.

The object of the present invention is thus to present a heating muffle for a muffle kiln for the production of a dental ceramic product containing titanium, with which a uniform heat transfer can be made in a simple way to a dental ceramic product, and temperature gradients can be avoided during firing. In addition, a method for the production of this heating muffle and a muffle kiln containing the muffle will be created.

The present invention solves the object that has been presented with a heating muffle for a muffle kiln for the production

of a dental ceramic product containing titanium according to claim

1. This heating muffle comprises a hollow unit which is provided with at least one opening for the uptake of the ceramic product and has inner walls that can be completely heated. Together with a pedestal, the heating muffle can form a firing chamber, in which the ceramic product is heated by the inner walls. The hollow unit comprises at least one spirally bent tube containing a heat conductor for a uniform heat transfer to the dental ceramic product and in order to avoid temperature gradients.

By the simple construction of the spirally shaped tube containing a heat conductor and the construction of the heating muffle as a hollow unit with inner walls that can be completely heated, on the one hand, a uniform and direct heat transfer can be made onto the ceramic product from uniformly heatable inner walls of the hollow unit constituted by the tube containing the heat conductor and, on the other hand, an outflow of heat through an unheated part of the hollow unit and thus a temperature gradient can be avoided. The entire inner walls of the hollow unit of the heating muffle according to the invention can be heated rapidly in this way and heating up can be easily controlled by applying voltage to the heat conductor. Therefore, with the exception of the pedestal, the entire inner walls of the firing chamber are completely heated. Locally overheated regions on the inner walls

of the hollow unit will be avoided and a ceramic product can be heated uniformly essentially without temperature fluctuations by the inner walls of the hollow unit. Heat transfer is produced uniformly. Temperature gradients will be avoided. A regulation of different heat conductors that can be controlled by turning them on and off is thus not necessary. Different temperature zones on the inner walls and temperature gradients on the inner walls of the firing chamber will be avoided, which necessarily occur in devices of the prior art due to the delay in the temperature regulation of different regions in the firing chamber.

In addition, the present invention provides a method for the production of the heating muffle according to the invention. Thus, for forming the hollow unit having heatable inner walls, a tube containing a heat conductor is spirally arranged.

Also, a new and advantageous muffle kiln is created, which contains the heating muffle according to the invention.

Other advantageous embodiments of the present invention result from the subclaims.

DESCRIPTION OF THE DRAWINGS

The present invention will now be explained on the basis of the attached drawings. Here:

Fig. 1 shows the cross section of a heating muffle

according to the invention for a muffle kiln for the production of a dental ceramic product containing titanium;

Fig. 2 shows the cross section of another heating muffle according to the invention;

Fig. 3 shows the top view onto the heating muffle according to Fig. 2.

Fig. 1 shows a heating muffle 10 according to the invention. It comprises a hollow unit, which is provided for the uptake of a ceramic product (not shown) with an opening 11. The opening of the hollow unit is aligned toward the bottom in the operating position and can act together with a pedestal (not shown) to form a firing chamber after taking up the ceramic product. The muffle according to the invention can be used, for example, in the muffle kiln described in EP-A-0 087,111, but may also be used in any other common muffle kiln. The hollow unit is comprised of a cylinder sealed with a cylinder cover 12 with height H and diameter D. The cylinder comprises the cylinder jacket 15 and the cylinder cover 12.

The cylinder cover 12 is flat. In an alternative embodiment, however, it may also be arched, so that it is shaped like a hemisphere or like a dome, as shown in Fig. 2. The cylinder cover 12 is preferably closed. It may also have, however, another opening 13 with a diameter d for a thermocouple, as shown in

Fig. 1 and Fig. 2. In the embodiment with closed cylinder cover, a thermocouple can be introduced, for example, through the pedestal into the firing chamber. The hollow unit comprises a spirally bent tube 16 containing a heat conductor for a uniform heat transfer to a ceramic product and in order to avoid temperature gradients. In a preferred embodiment, the hollow unit is comprised of a single such tube. Thus it can be produced in a simple manner. It may also comprise, however, several spirally bent tubes, if this is necessary, for example, due to the size of the muffle.

Fig. 2 shows another embodiment of a heating muffle according to the invention, wherein the elements which are also shown in Fig. 1 are characterized by the same reference numbers. The heating muffle in Fig. 2 comprises a hollow unit, which is comprised of a cylinder closed on one end with an arched cylinder cover 12'. The cylinder cover 12' is also preferably closed. The other opening 13 for a thermocouple, however, is shown in Fig. 2.

In all embodiments of the heating muffle according to the invention, the heat conductor 18 is preferably found in the wall of the tube 16. It may be arranged spirally in the bent tube 16, as shown in Figure 2.

The wall thickness of the tube 16 may amount to 1 to 4

mm, preferably 1.5 to 3 mm, and even more particularly preferred, it is 1.5 mm. The outer diameter OD of the tube 16 may amount to 8 to 14 mm, preferably 8 to 12 mm, and even more particularly preferred, it is 10 mm. The inner diameter ID of the tube 16 may amount to 6 to 13 mm, preferably 7 to 10 mm, and even more particularly preferred, it is 7 mm.

The tube 16 may be made of quartz and preferably it is comprised of fused quartz or quartz glass. Even more particularly preferred is quartz glass. Since quartz glass is transparent, the heat transfer from the heat conductor contained in the quartz glass can be made directly onto the ceramic product as primary radiation. Therefore, the heat transfer is made in an even more uniform manner. The heating and firing processes can be more easily controlled than in a heating muffle with a hollow unit made of an opaque fused quartz tube. In the case of an opaque fused quartz tube containing a heat conductor, the heat transfer is produced by secondary radiation. The heat conductor first heats the fused quartz tube and the latter transfers the heat onto a ceramic product found in the firing chamber.

The height H of the hollow unit of the heating muffle according to the invention is not particularly limited. For example, it can amount to 50 to 150 mm, and preferably it amounts to 60 to 80 mm.

In a preferred embodiment, it amounts to approximately 70 mm when the hollow unit is comprised of a cylinder sealed with a flat cylinder cover, as shown in Fig. 1.

In an embodiment according to Fig. 2 with arched cylinder cover, the height H of the hollow unit amounts to approximately 80 mm in a particularly preferred embodiment. The height h of the cylinder jacket 15 can amount to 20 to 50 mm, and preferably it amounts to 25 to 30 mm, and even more particularly preferred, approximately 28 mm.

The diameter D of the hollow unit can amount to 70 to 150 mm. Preferably, the diameter D amounts to 90 to 130 mm. In the preferred embodiments according to Fig. 1 and Fig. 2, the diameter D of the cylinder amounts to approximately 110 mm.

The radius r of the hemispherically arched cylinder cover can amount to approximately 30 to 70 mm, preferably 40 to 60 mm, and even more particularly preferred, approximately 50 mm.

In another embodiment of the heating muffle according to the invention, which is not shown, the hollow unit is comprised of an essentially hemispherically shaped hollow unit or an essentially spherically shaped hollow unit, wherein this hollow unit preferably has a diameter D and a radius r with the values described above for the other embodiments. In this embodiment, which is not shown, an even more uniform heat transfer onto the

ceramic product is produced than in the embodiments shown in Fig. 1 and Fig. 2.

A central arrangement of the ceramic product on the pedestal, which forms the firing chamber together with the muffle in the operating position, is particularly advantageous. For the central arrangement of a ceramic product in an essentially spherically shaped hollow unit, the pedestal can have a raised part in the center on which is positioned the ceramic product for the firing process, so that in the operating position, the ceramic product is found approximately in the central point of the essentially spherically shaped hollow unit. In addition, the embodiments with the essentially hemispherically shaped hollow unit or with the essentially spherically shaped hollow unit, which are not shown, may also have another opening for a thermocouple, in addition to the opening for the uptake of the ceramic product.

The diameter d of the other opening 13 for a thermocouple can amount to 8 to 50 mm and preferably it amounts to 8 to 40 mm, in all embodiments.

Fig. 3 shows a top view onto the heating muffle according to Fig. 2. It comprises a single tube 16 containing a heat conductor which is spirally arranged for forming the hollow unit having heatable inner walls. Electrical connections 21 and 22 are

found on the end of the spirally arranged tube 16, by means of which the heat conductor contained in tube 16 can be supplied with voltage.

In the method for the production of the heating muffle according to the invention, as can be seen in Fig. 3, a tube 16 containing a heat conductor 18 for forming the hollow unit having heatable inner walls is spirally arranged. The pitch of the spirally shaped arrangement results from the above-given values of the tube and the shape of the hollow unit.

Thus, tube 16 can be arranged spirally relative to a cylinder comprised of a cylinder jacket 15 or 15' and a cylinder cover 12 or 12' sealing the cylinder on one end. For the formation of an arched cylinder cover 12', the tube can be arranged spirally with a smaller radius relative to cylinder jacket 15', so that the heating muffle shown in Fig. 2 can be produced.

In order to form a flat cylinder cover 12 with a smaller radius relative to cylinder jacket 15, the tube can be arranged spirally whereby the spiral shape in the region of the cylinder cover 12 does not have a pitch, so that the heating muffle shown in Fig. 1 is obtained.

Tube 16, however, can also be arranged spirally for an essentially hemispherically shaped hollow unit or an essentially spherically shaped hollow unit.

The spiral arrangement of the tube 16 containing a heat conductor can be produced on both ends in all of these methods. It may have another opening 13 for a thermocouple on the end which has the opening 11 for the uptake of the ceramic product, or also on the end which is completely closed. All of these methods offer the advantage that the milling of a groove in a support material made of ceramics or ceramic fibers is not necessary.

A new and advantageous muffle kiln contains a heating muffle according to the invention, which can be produced in a simple manner according to one of the above-described methods.

What is claimed is

1. A heating muffle for a muffle kiln for the production of a dental ceramic product containing titanium, which comprises a hollow unit, which is provided for the uptake of the ceramic product with at least one opening (11) and has completely heatable inner walls, and which can form together with a pedestal a firing chamber in which the ceramic product is heated by the inner walls, is hereby characterized in that the hollow unit comprises at least one spirally bent tube (16) containing a heat conductor (18) for a uniform heat transfer to the product and in order to avoid temperature gradients.

2. The heating muffle according to claim 1, further characterized in that the opening (11) of the hollow unit is aligned toward the bottom in the operating position and can act together with a pedestal to form the firing chamber after taking up the ceramic product.

3. The heating muffle according to claim 1 or 2, further characterized in that the hollow unit is comprised of a cylinder sealed on one end with a cylinder cover (12; 12').

4. The heating muffle according to claim 3, further characterized in that the cylinder cover is flat (12) or arched (12').

5. The heating muffle according to one of claims 1 or 2, further characterized in that the hollow unit is essentially hemispherically shaped or essentially spherically shaped.

6. The heating muffle according to one of claims 1 to 5, further characterized in that the tube (16) is made of quartz, preferably of fused quartz or quartz glass.

7. The heating muffle according to one of claims 1 to 6, further characterized in that the heat conductor (18) is spirally arranged in tube (16).

8. The heating muffle according to one of claims 1 to 7, further characterized in that the hollow unit has another opening (13) for a thermocouple.

9. A method for the production of a heating muffle according to one of claims 1 to 8, characterized in that a tube (16) containing a heat conductor (18) for forming the hollow unit having heatable inner walls is spirally arranged.

10. The method according to claim 9, further characterized in that the tube is spirally arranged relative to a cylinder and a cylinder cover (12; 12') sealing the cylinder on one end.

11. The method according to claim 10, further characterized in that in order to form an arched cylinder cover (12') with a smaller radius relative to cylinder jacket (15'), the tube is arranged spirally.

12. The method according to claim 10, further characterized in that in order to form a flat cylinder cover (12) with a smaller radius relative to cylinder jacket (15), the tube is arranged spirally, wherein the spiral shape has no pitch in the region of the cylinder cover (12).

13. The method according to claim 9, further characterized in that the tube is arranged spirally for an essentially hemispherically shaped hollow unit or an essentially spherically shaped hollow unit.

14. A muffle kiln, containing a heating muffle according to one of claims 1 to 8 or a heating muffle, which has been produced

according to a method according to one of claims 9 to 13.

1/2

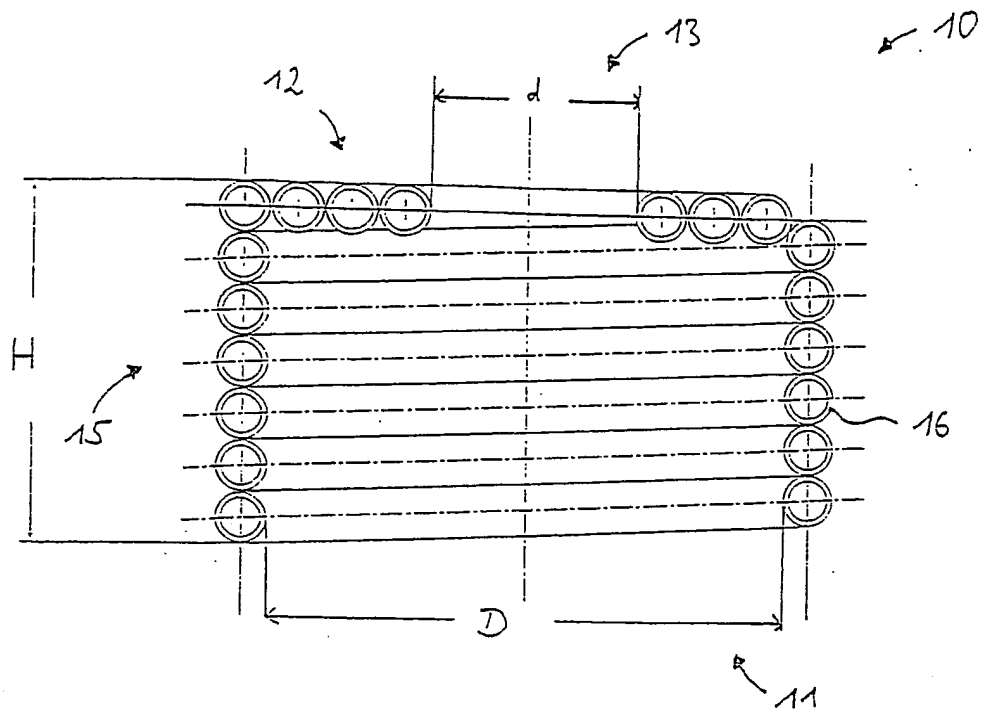


Fig. 1

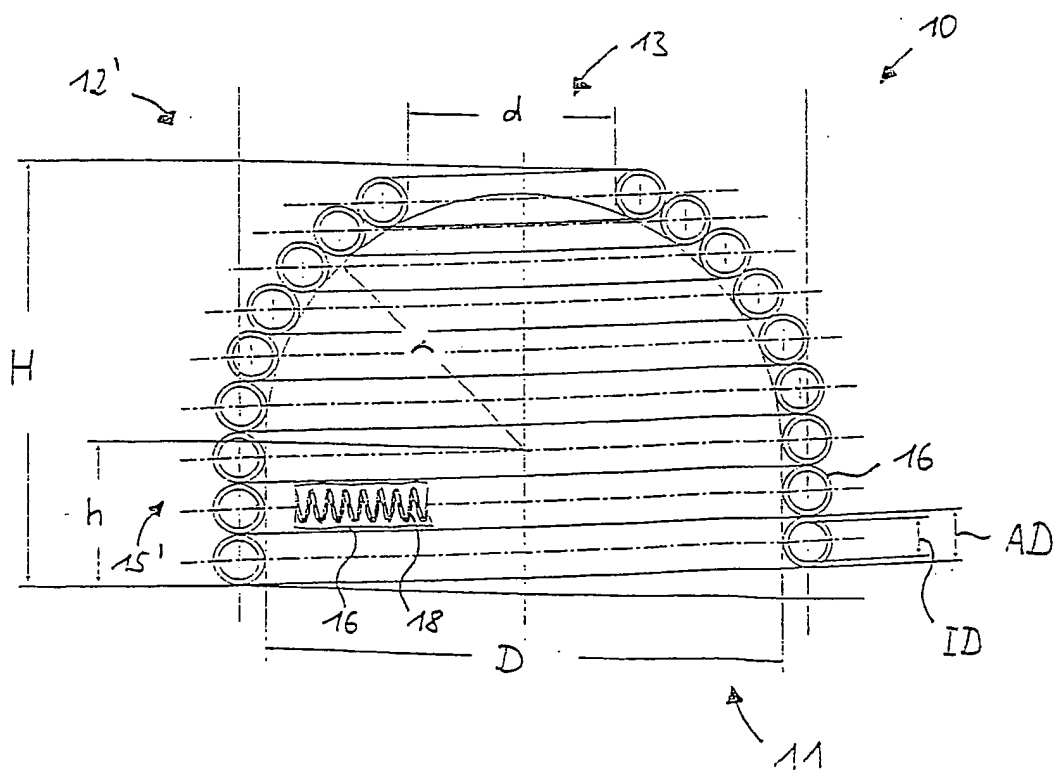


Fig. 2

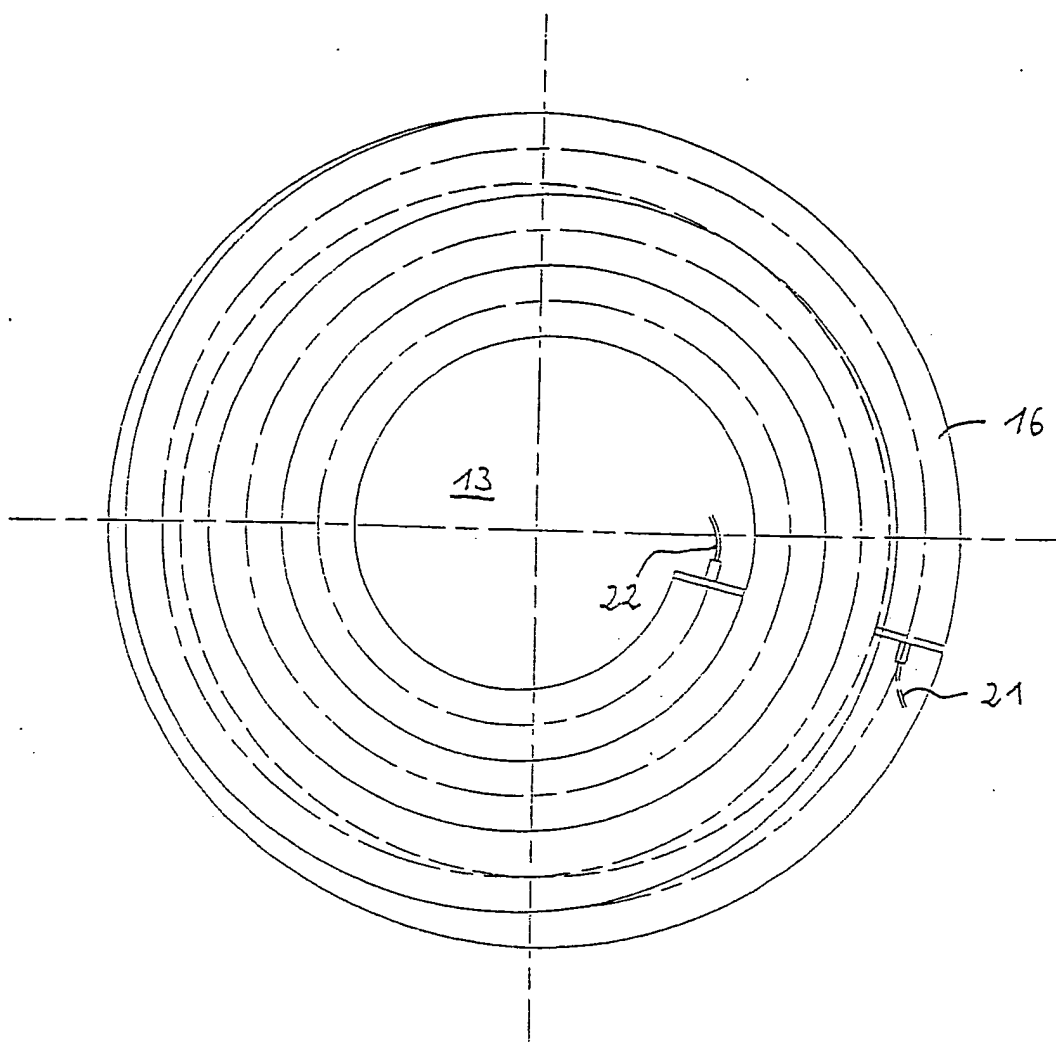


Fig. 3

A. CLASSIFICATION OF SUBJECT MATTER
 IPC 7 F27B17/02 A61K6/00 F27B5/14

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
 IPC 7 F27B A61K

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, PAJ, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 6 252 202 B1 (ZYCHEK GEORGE N) 26 June 2001 (2001-06-26) figures claims	1-14
A	DE 43 03 458 C (HINTERBERGER DR KARL) 27 January 1994 (1994-01-27) figures claims	1-14
A	DE 43 02 570 C (KOZMACS OTTO) 24 March 1994 (1994-03-24) figures claims	1-14
	--- -/-	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *Z* document member of the same patent family

Date of the actual completion of the international search

20 October 2003

Date of mailing of the international search report

30/10/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
 NL - 2280 HV Rijswijk
 Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
 Fax: (+31-70) 340-3016

Authorized officer

Thornton, S

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0 079 730 A (DOCX ALBERT GEORGE) 25 May 1983 (1983-05-25) figures claims	1-14
A	US 6 157 004 A (BIZZIO NICKOLAS) 5 December 2000 (2000-12-05) cited in the application figures claims	1-14
A	GB 1 585 458 A (DOCX AG) 4 March 1981 (1981-03-04) figures claims	1-14
A	US 3 952 408 A (DOCX ALBERT GEORGE) 27 April 1976 (1976-04-27) figures 2-6 claims	1-14

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 6252202	B1	20-06-2001	NONE
DE 4303458	C	27-01-1994	DE 4303458 C1 27-01-1994
DE 4302570	C	24-03-1994	DE 4302570 C1 24-03-1994 WO 9416642 A1 04-08-1994
EP 0079730	A	25-05-1983	EP 0079730 A1 25-05-1983
US 6157004	A	05-12-2000	NONE
GB 1585458	A	04-03-1981	DE 2718596 A1 10-11-1977 FR 2361615 A1 10-03-1978 JP 52138736 A 19-11-1977 US 4272670 A 09-06-1981
US 3952408	A	27-04-1976	GB 1350574 A 18-04-1974 DE 2114755 A1 25-11-1971 FR 2087963 A5 31-12-1971 SE 378734 B 08-09-1975